



RELIEF VALVE

Direct Acting, Pilot Stage



SERIES - SRV2


Full Adjustment 5 Turns

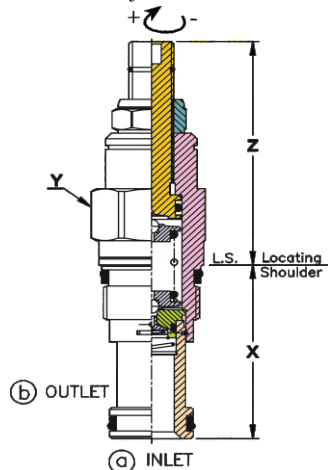


Performance Curves

Typical Pressure Rise

SRV2 - 01

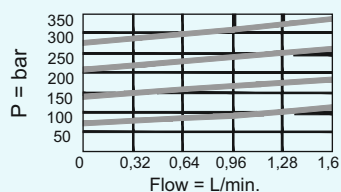

SRV2 - 02

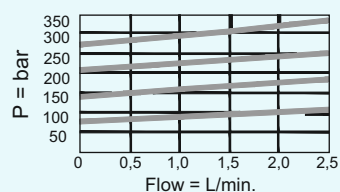

Capacity	Typical Cartridge Model Code	Cavity	Cartridge Dimensions			Installation Torque (Nm)
			X	Y	Z	
1 L/min.	SRV2 - 01 - S - HC	CV - 227	39.7	22.2	51	40/50
2 L/min.	SRV2 - 02 - S - HC	CV - 226	47.8	28.6	54	60/70

- Maximum operating pressure = 5000 psi
- Typical response time 2 ms.
- Maximum leakage less than 0.4 cc/min.
- Back pressure on the tank port (port 2) is directly additive at a 1:1 ratio to the valve setting

ORDERING INFORMATION

SRV **2** - ***** - **S** - *****
 1 2 3 4 5

1. Model Code - SRV
2. Model Series - 2
3. Nominal Capacity
01 = 1 L/min.
02 = 2 L/min.

4. Control - Standard Screw
5. Pressure Range
HC = 29 - 3000 psi
YL = 29 - 4500 psi